
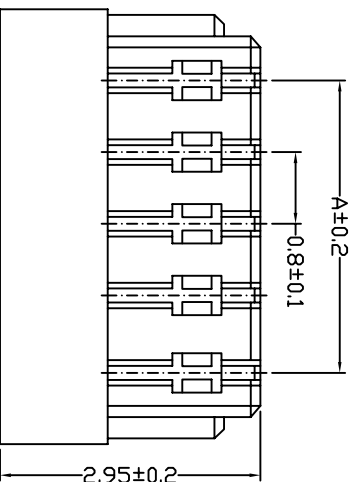
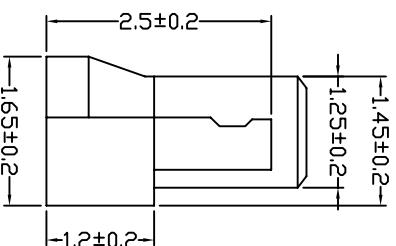


NO.	REV.	MODIFY NOTES	REVISED	DATE

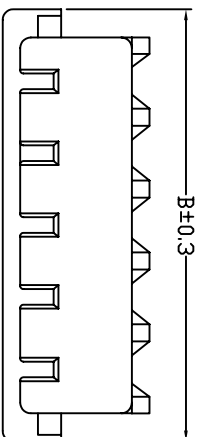

Poles	Part No	Dimensions (mm)	
		A	B
2	A0801H-02	0.80	2.40
3	A0801H-03	1.60	3.20
4	A0801H-04	2.40	4.80
5	A0801H-05	3.20	4.80
6	A0801H-06	4.00	5.60
7	A0801H-07	4.80	6.40
8	A0801H-08	5.60	7.20
9	A0801H-09	6.40	8.00
10	A0801H-10	7.20	8.80
11	A0801H-11	8.00	9.60
12	A0801H-12	8.80	10.40
13	A0801H-13	9.60	11.20
14	A0801H-14	10.40	12.00
15	A0801H-15	11.20	12.80
16	A0801H-16	12.00	15.00
17	A0801H-17	12.80	15.80
18	A0801H-18	13.60	16.60
19	A0801H-19	14.40	17.40
20	A0801H-20	15.20	18.20

■ SPECIFICATIONS

- Voltage rating: 100V AC, DC
- Current rating: 1A, AC, DC
- Withstanding Voltage: 500V AC/minute
- Insulation resistance: 500MΩmin
- Temperature range: -25° C~+85° C
- Contact resistance: Initial value/10mΩmax
- After environmental testing/20mΩmax

■ HOUSING

- Part No.: A0801H-XX
- Poles: 2-20
- Material: Insulator: PA46, UL 94V-0
- Contact: Coppy Alloy, Tin Plated

SIGNATURE

DATE

TOLERANCE:

X. ±XXX

.X ±0.20

.XX ±0.10

ANG.

SKYSUKTRONICS INDUSTRIAL CO.,LTD

PRODUCT NAME 0.8mm IDC Housing

PRODUCT CODE A0801H-XX

Perspective



CODE NO.

LS00

CUS. NO.

SCALE

None

UNIT

mm

PAGE

1/1

D R N.

C H K.

A P P.