

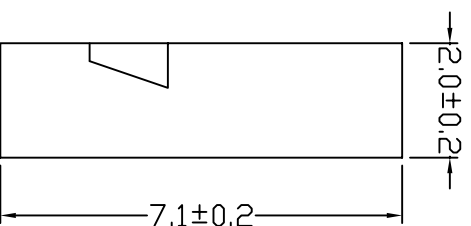


NO.	REV.	MODIFY NOTES	REVISED	DATE
1	A	L070521	MIKE	07.05.21
2	B			

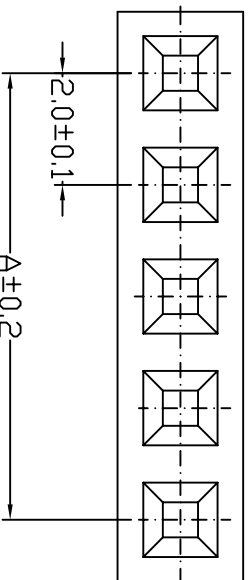

$B \pm 0.3$

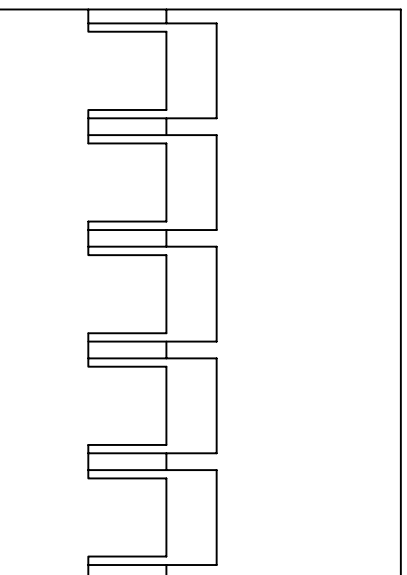

SPECIFICATIONS

- Voltage rating: 250V AC, DC
- Current rating: 3A, AC, DC
- Withstanding Voltage: 1000V AC/minute
- Insulation resistance: 1000M Ω min
- Temperature range: -25° C~+85° C
- Contact resistance: Initial value/10m Ω max
- After environmental testing/20m Ω max

HOUSING

- Part No.: G2001H-1*XX
- Poles: 02-20
- Material: PBT UL 94V-0
- Qty: 1000pcs/bag

Poles	Part No	Dimensions (mm)	
		A	B
2	G2001H-1*02	2.00	4.35
3	G2001H-1*03	4.00	6.35
4	G2001H-1*04	6.00	8.35
5	G2001H-1*05	8.00	10.35
6	G2001H-1*06	10.00	12.35
7	G2001H-1*07	12.00	14.35
8	G2001H-1*08	14.00	16.35
9	G2001H-1*09	16.00	18.35
10	G2001H-1*10	18.00	20.35
11	G2001H-1*11	20.00	22.35
12	G2001H-1*12	22.00	24.35
13	G2001H-1*13	24.00	26.35
14	G2001H-1*14	26.00	28.35
15	G2001H-1*15	28.00	30.35
16	G2001H-1*16	30.00	32.35
17	G2001H-1*17	32.00	34.35
19	G2001H-1*18	34.00	36.35
19	G2001H-1*19	36.00	38.10
20	G2001H-1*20	38.00	40.35

SIGNATURE
MIKE

DATE
07.05.21

DR N.
CHK.
APP.

TOLERANCE:

X. \pm XXX

.X \pm 0.20

.XX \pm 0.10

ANG.

SKYSUKTRONICS INDUSTRIAL CO.,LTD.

PRODUCT NAME
2.0MM Crimp Housing

PRODUCT CODE
G2001H-1*XX

Perspective



CODE NO.
LS00

CUS. NO.

SCALE
None

UNIT
mm

PAGE
1/1