

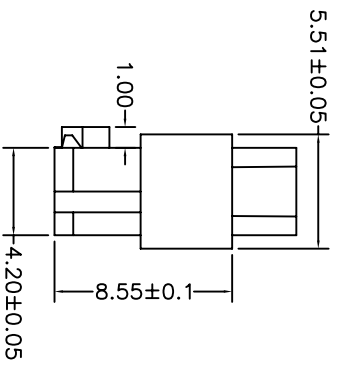
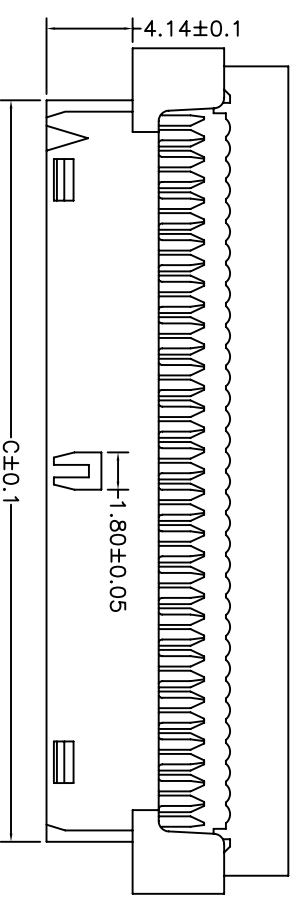


REV.	DESCRIPTION	DATE
A	RELEASE	2010/6/19

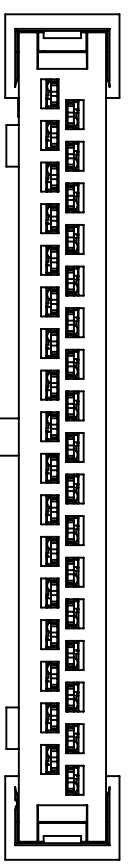

CKT. SIZE	A	B	C
10	16.65	8.00	11.65
12	18.65	10.00	13.65
14	20.65	12.00	15.65
16	22.65	14.00	17.65
20	26.65	18.00	21.65
22	28.65	20.00	23.65
26	32.65	24.00	27.65
34	40.65	32.00	35.65
40	46.65	38.00	41.65
44	50.65	42.00	45.65
50	56.65	48.00	51.65

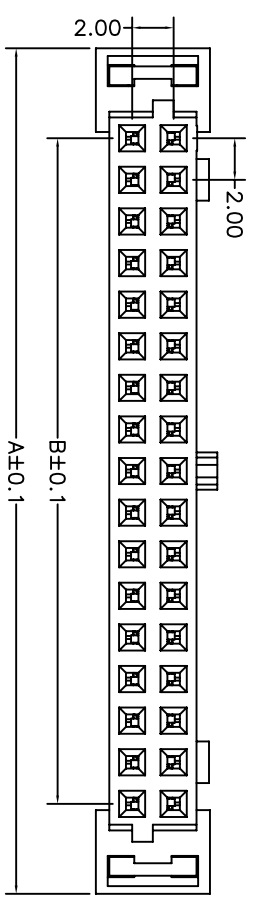

Material:
 Insulator: PBT+30% Glass Fiber (UL94V-0).
 Contact: Copper Alloy with Gold or Tin over Nickel Plated.
 Specification:
 Current Rating: 1 Amp.
 Withstanding Voltage: AC 500V for 1 Minute.
 Insulation Resistance: 1000M Min. at DC 500V.
 Contact Resistance : 15m Max..
 Operating Temperature: -40° C ~ +105° C.

UNLESS TOLERANCE		DRAW BY	YUAN	
GENERAL	ANGLE	DESIGN BY	.MGRID	
X. ± 0.30	X' ± 3.0'	CHECK BY		
.XX ± 0.20	.XX' ± 2.0'	APPROVE BY		
.XXX ± 0.15	.XXX' ± 1.0'	SCALE	SHEET	UNIT
.XXX ± 0.08	.XXX ± 0.5'	1:1	1/1	MM

ITEM : MGRID 2.0MM
 DUAL ROW IDT RECEPTACLE

DRW NO: MGRID2001HM-XX REV: A

1 2 3 4 5 6

A

B

C

D