


NO.	DATE	REV.	MODIFY NOTES	REVISED
1	2009/01/27	A/0	新版发行	傅顺

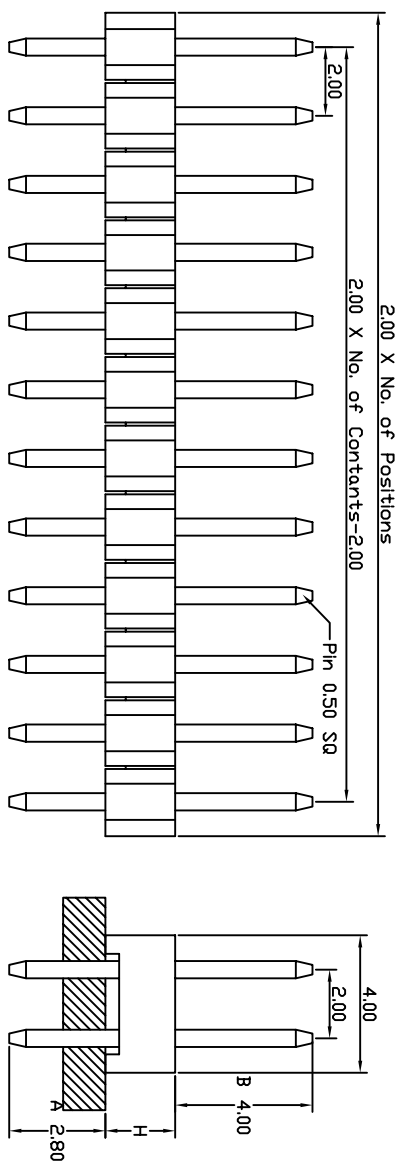

SPECIFICATIONS

Current Rating : 1.5AMP

Operation Temperature :-40°C to +105°C

Contact Resistance : 20m Ω Max.


Insulation Resistance : 1000M Ω Min

Withstanding Voltage : AC 500V

Insulator Material : Polyester (UL94V-0)
Standard: Nylon-66

Contact Material : Bronze

Contact Plating : Au or Over 50 U" Ni

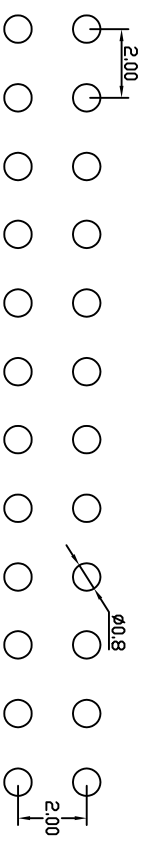

PCB LAYOUT

PH2001 XX GO X S XXX 01

Plastics Height
H=1.5mm
H=2.0mm

No. of Pins Per-Row
2-40
2-80

Connector Plating
SN : Tin
G0 : Gold Flash
G2 : Sn/Gold
G3 : 10U" Gold
G4 : 15U" Gold
G5 : 30U" Gold
S0 : Gold Flash/Tin Standard:G0

Insulator Material Option
A BK-PBT
B BK-PA66
C BK-PA6T
D BK-PA46
F BK-LCP
S Special

Connector Type
S=Straight
R=Right Angle

Pin Length
XXX=A+B+H
XXX=A+B+H+D+1.0

QUALITY SYMBOLS	GENERAL TOLERANCES
X	± 0.15
.X	± 0.08
.XX	± 0.05
.XXX	± 0.00

ANGLE TOLERANCES

X°	± 2.0°
.X°	± 1.0°
.XX°	± 0.5°
.XXX°	---

Skysuktronics Industrial Co., Ltd.

DRAWN BY	DATE	TITLE:	2.00mm Pin Header, Dual Row, Straight/Right Angle
CHECKED BY	DATE	PART NO.	PI-090110034
APPROVED BY	DATE	MATERIAL	HRC
			UNIT: mm